



Data Sheet

Customer:

Part No:

Sample No:

Description:

Item No:

CL-3019EGW1A-002-CC

3Ø Lamp R+YG Color

Customer			
Check	Inspection	Approval	Date

Features

Low power consumption

High Efficiency

Round type

T1 (3mm) diameter

With Flange

Solder leads without stand-off

Compliant with RoHS

Descriptions

Chip Material: GaAsP/GaP、GaP/GaP

Emitting Color: Red、Green



Lens Color: White Diffused

ATTENTION



OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

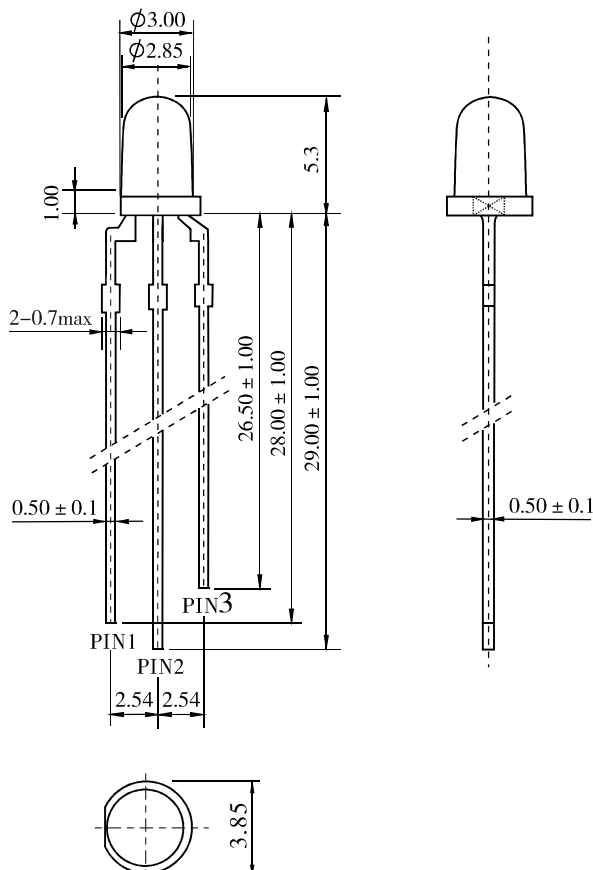

Tolerance is $\pm 0.25\text{mm}$
Unless Otherwise Specified.

Electrical Optical Characteristics (Ta=25℃)

Parameter	Symbol	Red			Unit	Test Condition
		Min	Typ	Max		
Forward Voltage	V _F	---	1.8	2.2	V	IF=20mA
Luminous Intensity	I _V	13.7	26.6	52.0	med	IF=20mA
Peak Wavelength	λ _P	---	632	---	nm	IF=20mA
Dominant Wavelength	λ _d	---	624	---	nm	IF=20mA
Spectral Line half-width	Δλ	---	20	---	nm	IF=20mA
Reverse Leakage Current	I _R	---	---	50	μA	VR=5V
Viewing Angle	2 θ _{1/2}	---	60	---	Deg	IF=20mA

Absolute Maximum Parameters (Ta=25℃)

Parameter	Symbol	Condition	Rating	Unit
Power Dissipation	P _D	---	55	mW
Reverse Voltage	V _R	---	5	V
Forward Average Current	I _F	---	25	mA
Temperature Coefficient	I/C	---	0.33	mA/℃
Pulse Current	IFP	Duty=1/10,1kHz	100	mA
Operating Temperature Range	T _{opr}	---	-25 ~ +85	℃
Storage Temperature Range	T _{stg}	---	-30 ~ +100	℃
Soldering Condition	T _{sd}	---	260℃/5sec	℃






NOTE:

Luminous Intensity Measurement allowance is ± 10%.

2 θ_{1/2} is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

The dominant wavelength is derivd from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Typical Electro–Optical Characteristic Curves (Ta=25℃) (Red)

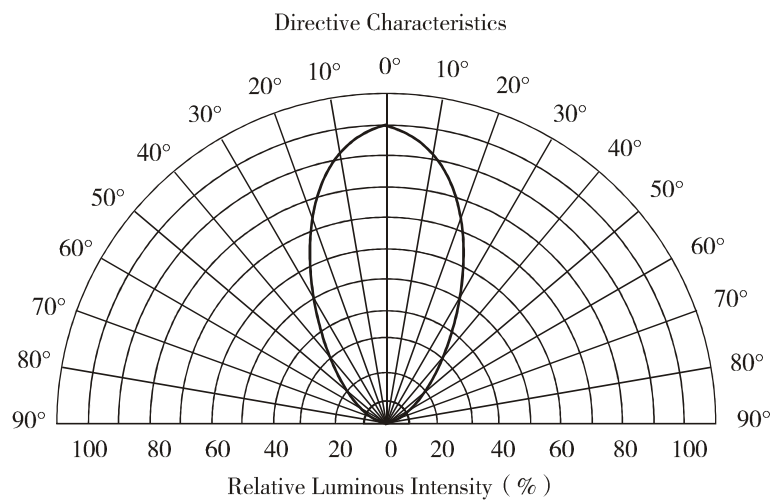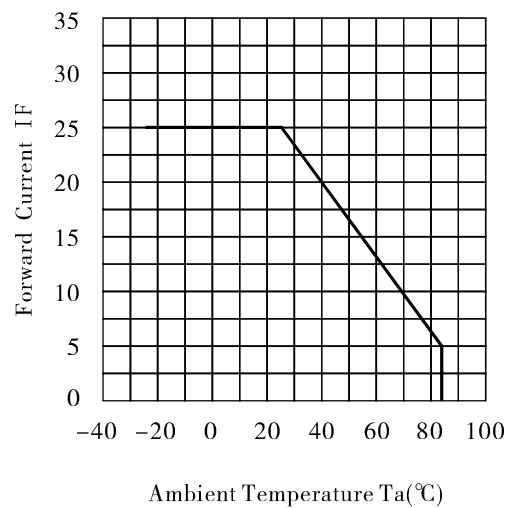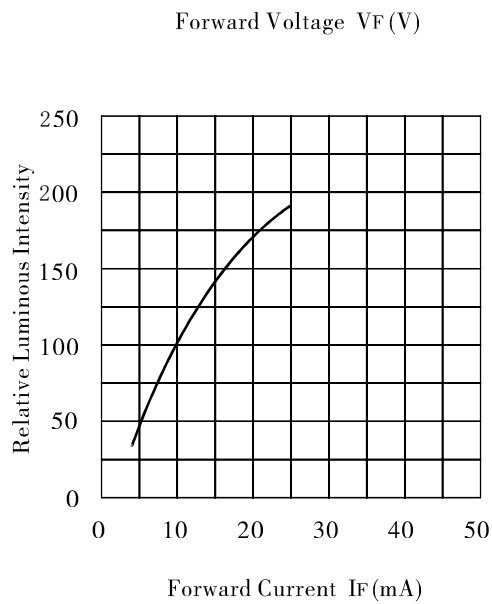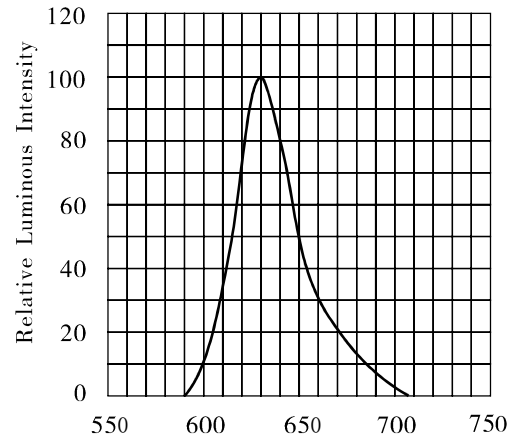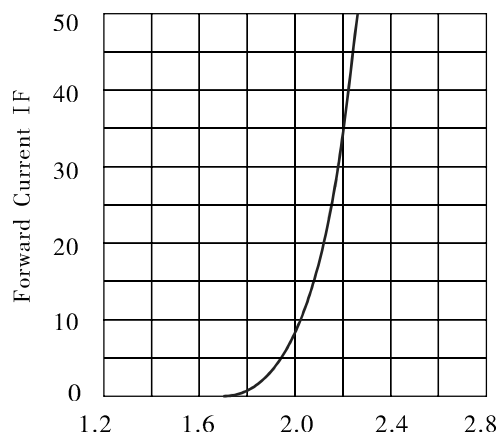

Electrical Optical Characteristics (Ta=25℃)

Parameter	Symbol	Green			Unit	Test Condition
		Min	Typ	Max		
Forward Voltage	V _F	---	2.2	2.6	V	IF=20mA
Luminous Intensity	I _V	26.6	52.0	72.8	med	IF=20mA
Peak Wavelength	λ _P	---	568	---	nm	IF=20mA
Dominant Wavelength	λ _d	---	572	---	nm	IF=20mA
Spectral Line half-width	Δλ	---	30	---	nm	IF=20mA
Reverse Leakage Current	I _R	---	---	50	μA	VR=5V
Viewing Angle	2 θ _{1/2}	---	60	---	Deg	IF=20mA

Absolute Maximum Parameters (Ta=25℃)

Parameter	Symbol	Condition	Rating	Unit
Power Dissipation	P _D	---	65	mW
Reverse Voltage	V _R	---	5	V
Forward Average Current	I _F	---	30	mA
Temperature Coefficient	I/C	---	0.33	mA/℃
Pulse Current	I _{FP}	Duty=1/10,1kHz	100	mA
Operating Temperature Range	T _{opr}	---	-25 ~ +85	℃
Storage Temperature Range	T _{stg}	---	-30 ~ +100	℃
Soldering Condition	T _{sd}	---	260℃/5sec	℃






NOTE:

Luminous Intensity Measurement allowance is ± 10%.

2 θ_{1/2} is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

The dominant wavelength is derivd from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Typical Electro–Optical Characteristic Curves (Ta=25℃) (Green)

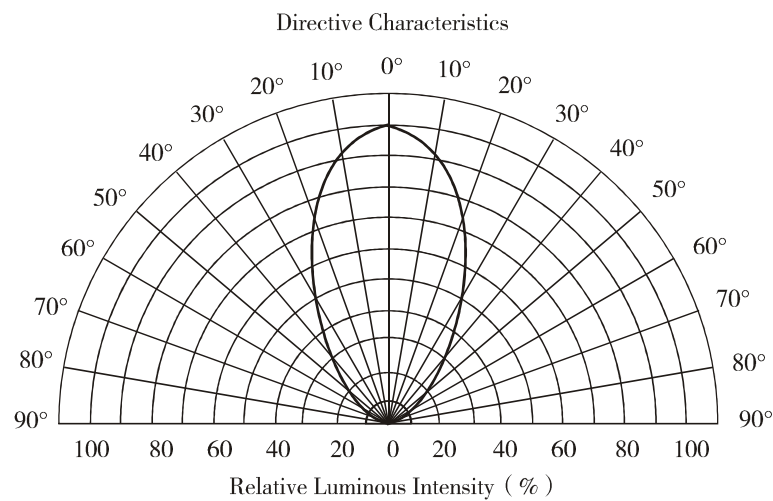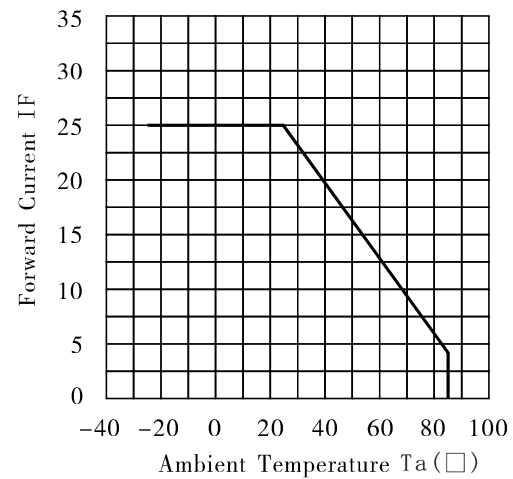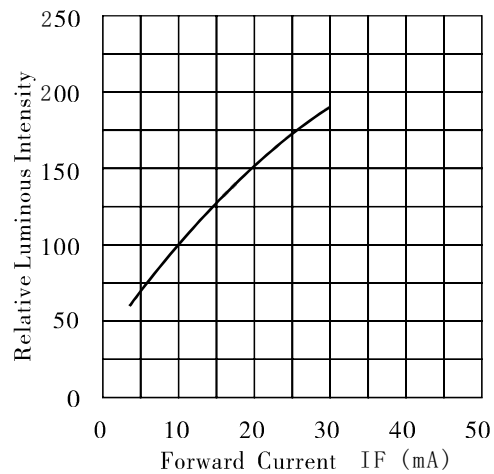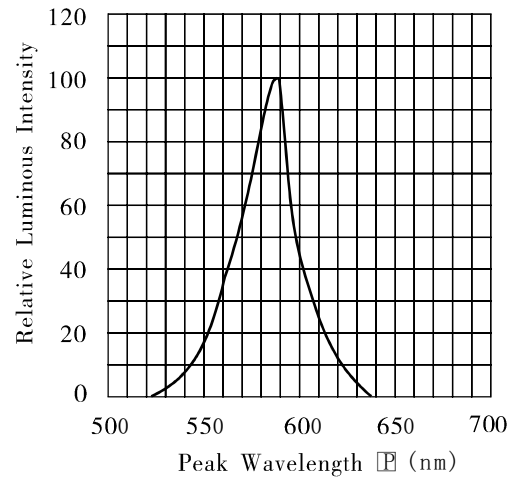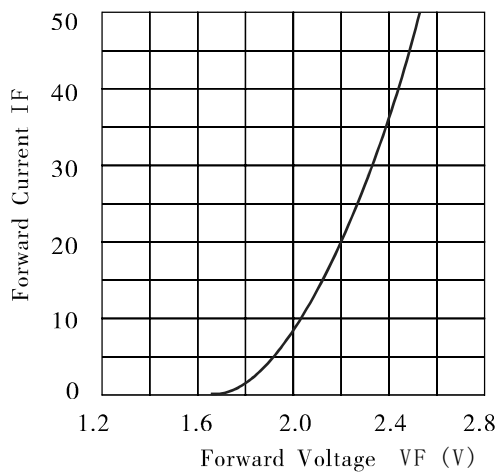

BIN Sub-Scale

Unit: @20mA		Luminous Intensity		Dominant Wavelength	
BIN Code	Color	Min	Max	Min	Max
F	Red	13.7	19.0	618	625
G		19.0	37.2	618	625
H		37.2	52.0	618	625
G	Green	26.6	37.2	570	572.5
H		37.5	52.0	570	572.5
J		52.0	72.8	570	572.5

Note: Tolerance of each bin limit is $\pm 15\%$

Reliability Test Conditions

Test Item	Test Condition	Result	Judgment Criteria
Consecutive operating life test	IF=20mA, T=25℃, t=168h	0/100	Forward Voltage $V_F(V) = \text{Upper Limit} \times 1.2$ Reverse Leakage Current $I_R(\mu A) = \text{Upper Limit} \times 2.0$ Luminous Intensity IV $(\text{mcd}) = \text{Lower Limit} \times 0.7$
High temperature storage life test	T=100℃, t=168h	0/100	
Low temperature storage life test	T=25℃, t=168h	0/100	
High temperature humidity storage life test	T=85 ± 2℃, RH=85% ± 3, t=168h	0/100	
Temperature cycle test	-25℃~25℃~100℃ 30min 5min 30min 10cycles	0/100	
Thermal shock test	100℃ 0℃ 5min 5min 20cycles	0/100	
Soldering heat test	T=260 ± 5℃, t=10s ± 1s	0/100	
Solderability test	T=235 ± 5℃, t=5s ± 0.5s	0/100	Steeped Part ≥ 95%
Fall test	h=100cm, 50times	0/100	Surface Appearance Photoelectric Properties Intact
Terminal strength test	W=9.8N, t=30 ± 5s	0/100	
Lead bending test	W=4.9N, 2times	0/100	

Package

Item	Inner packaging bag	Inner packaging box
Material	Antistatic bag	Single corrugated box
Quantity	1000PCS	Single corrugated box×10 =10000PCS
Marking	Label Marking: Type、Quantity	Certificate of conformity Marking: Product name 、 Type、Quantitye、 Date of manufacture
Size	16×16(cm)	30 ×19 ×11.5(cm)