

CL-3W-URB


Features:

- Long operating life
- Highest flux
- Available in Red
- Lambertian radiation pattern
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam, safe to the touch
- Instant light (less than 100ns)
- Fully dimmable
- No UV
- Lower R_{th}
- ROHS compliant


Applications

- Reading lights(car,bus,aircraft)
- LCD Backlights /light Guides
- Fiber optic alternative/Decorative/Entertainment
- Mini-accent/Up lighters/Down lighters/ Orientation
- Indoor/Outdoor commercial and Residential Architectural
- Cove/Under shelf /Task
- Bollards/Security/Garden
- Portable(flashlight,bicycle)
- Edge-lit signs (Exit, point of sale)
- Automotive Exit (stop -tail-Turn ,CHMSL,Mirror Side Repeat)
- Trafficsignaling /Beacons/railCrossing and Wayside

Radiation Pattern

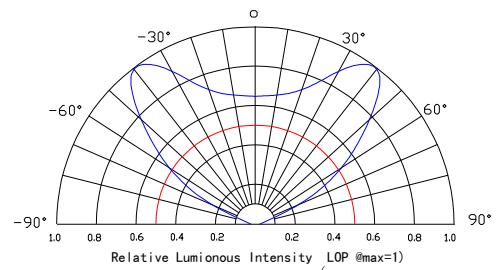

Package Dimensions

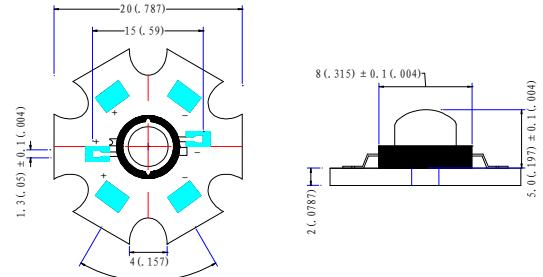

HIGH POWER

■ Typical Optical/Electrical Characteristics@TJ=25°C

| Item | symbol | Condition | Min | Typ | Max | Unit |
|-------------------------------------|-----------------|-----------|-----|-----|-----|------|
| Forward Voltage | VF | IF=800mA | 2.2 | 2.6 | 3.0 | V |
| Reverse Current | IR | VR=5V | | | 50 | uA |
| 50% Power Angle | $2\theta_{1/2}$ | IF=800mA | 110 | 120 | 130 | deg |
| Luminous Intensity | Φ_v | IF=800mA | 40 | 50 | | LM |
| Recommend Forward Current | IF | | | 800 | | mA |
| Wave length | λ_d | IF=800mA | 620 | 625 | 630 | nm |
| Thermal Resistance,Junction to Case | R _{jp} | IF=800mA | | 10 | | °C/W |

- Notes: 1. Tolerance of measurement of forward voltage $\pm 0.1\text{v}$
 2. Tolerance of measurement of peak Wavelength $\pm 2.0\text{nm}$
 3. Tolerance of measurement of luminous intensity $\pm 15\%$.

■ Absolute Maximum Rating

| Item | symbol | Absolute Maximum Rating | Unit |
|-----------------------------|------------------|-------------------------|------|
| Forward Current | IF | 800 | mA |
| Peak Forward Current* | IFD | 1200 | mA |
| Reverse Voltage | VR | 5 | V |
| Power Dissipation | PD | 3000 | mW |
| Operation Temperature | TOPR | -30°C to +80°C | |
| Storage Temperature | TSTG | -40°C to +100°C | |
| Lead Soldering Temperature* | T _{SOL} | 260°C for 3 Seconds Max | |

- IFP Conditions :Pulse Width $\leq 10 \text{ msec}$ duty $\leq 1/10$
- All high Power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly ,but we do not recommend lighting the high power products for more than 5 seconds without a appropriate heat dissipation equipment.
- Re-flow, wave peak and soak-stannum soldering etc. is not suitable for this products.
- Suggest to solder it by professional high power LED soldering machine.
- Can use invariable -temperature searing-iron with soldering condition: ≤ 260 degreen less than 3 seconds.

HIGH POWER

■ Typical optical/Electrical Characteristics Curves ($T_j=25^\circ\text{C}$ Unless Otherwise Noted)

