






CIXI WANJIE ELECTRONIC CO., LTD

product specification

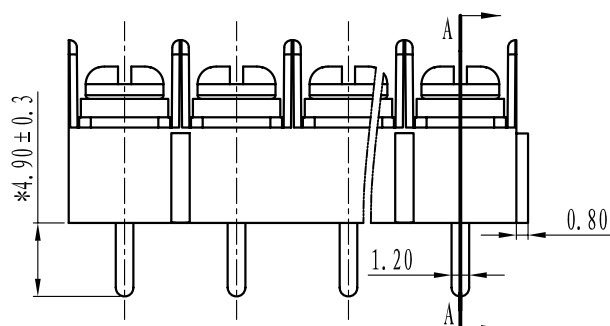

SECTION A-A

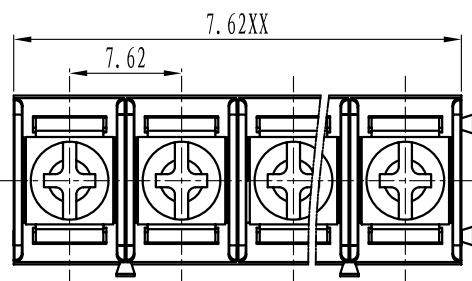

Electrical

Standard: UL IEC
Rated voltage: 300V 250V
Rated current: 10A 17.5A
Wire range: 22-14AWG 1.5mm²
Withstanding voltage: AC2000V/1Min
Insulation resistance: 500M Ω /DC1000V

Mechanical

Temp.Range: -40° C~+105° C
Max.Talue:5.10kgf.cm

Dimensions

Pitch: 7.62mm

Poles: 2P-XXP


Material

Housing: PA66, UL94V-0

Screws: M3, steel Nickel plated

Pin header: Brass, 0.8t, Tin plated

HOW TO ORDER

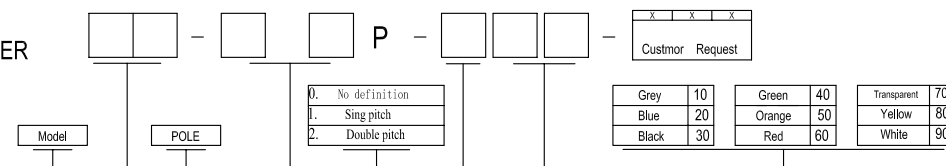

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		 short angle sid								
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all	to 6	over 6 to 10	over 10 to 50	over 50 to 120	all	to 5	over 5 to 30	over 30 to 120	over 120 to			
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
CIXI WANJIE ELECTRONIC CO., LTD					NAME	CZ-7620-A-XXP-1YY-00A