




CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

两线时只
有此卡脚

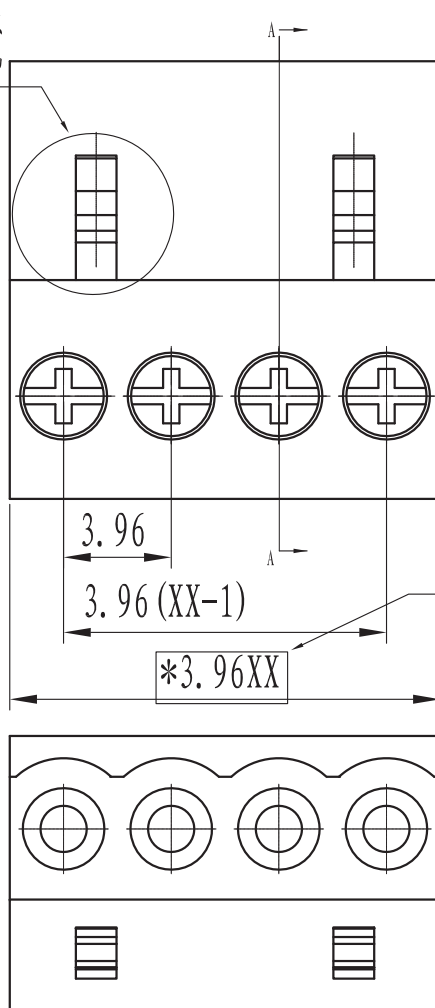

新模高度为
16.10mm

新模尺寸为3.96XXmm

SECTION A-A

新模尺寸为10.10mm

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	26~16AWG	1mm ²
Wrth standing voltage	AC 2000V/1 Min	

Mechanical

Torque(Max)	0.2Nm(1.7Lb.in)
Temp.Range	-40°C~+105°C

Dimensions

Pitch	3.96mm
Poles	02~24p

Material

Housing	PA66, UL94V-0
Screws	M2.0 Steel Zn plated
Clamp	Brass, Ni plated
Shrapnel	Brass, Ni plated

	linear dimension(Tolerances Standard GB/T 14486-2008)											≡	—	□	//	⊥
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	4:1	THIRD ANGLE PROJECTION	
 CIXI WANJIE ELECTRONIC CO., LTD						TITLE	HT396K-3.96-XXP-1YY-00A