
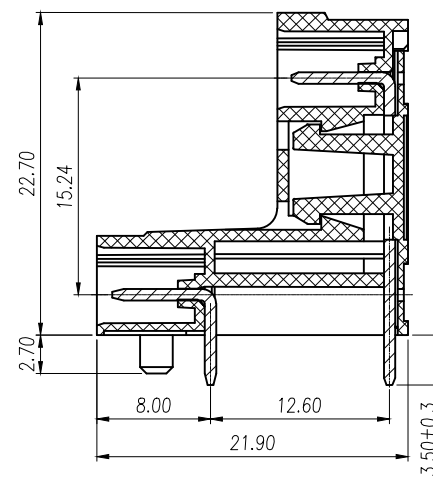


CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

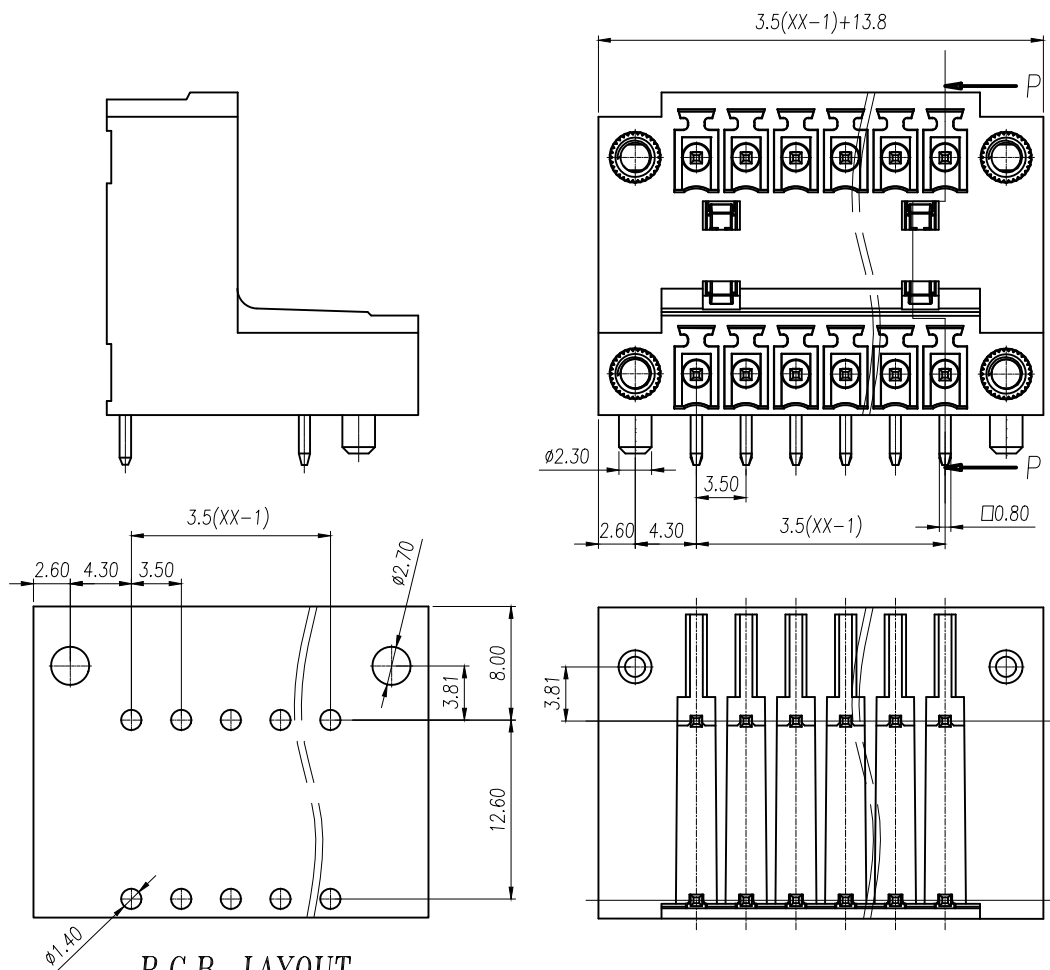

SECTION: P-P

UL/CUL Technical Data		UL1059		
Use Group		B	C	D
Rated Voltage	[V]	300	-	300
Rated Current	[A]	8	-	8
Wire Range				
Solid/Stranded	[AWG]	-		
Withstanding Voltage		1600V/1Min		
IEC Technical Data		IEC 61984		
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage	[V]	160	160	320
Rated Current	[A]	7	7	7
Impulse withstand voltagea	[KV]	2.5	2.5	2.5
Conductor cross section				
Solid/ flexible	[mm²]	-		
Material				
Insulation Material		PA		
Imflammability		UL94V-0		
Contact Material		Copper alloy		
Contactive Coating		Sn Plated		
Other Data				
Pitch	[mm]	3.5		
Poles	[P]	2*2~2*24P		
Stripping Length	[mm]	-		
Screw		-		
Torque(Max)	[N.m]	-		
Operating temperatur	[°C]	-40~105		

P.C.B. LAYOUT

	linear dimension(Tolerances Standard GB/T 14486-2008)										≡	—	□	//	⊥	
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.45	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	2:1	THIRD ANGLE PROJECTION	
						TITLE	WJ15EDGRTM-3.5-2*XP-1YY-00A
CIXI WANJIE ELECTRONIC CO., LTD							