



CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

2P时只有此侧有卡钩

5.08(XX+2)

5.08XX

A

6

A


5.08

15.05

5.08

5.08(XX-1)

5.08

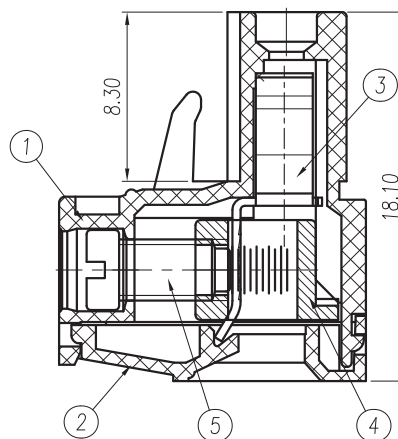

SECTION:A-A

Electrical

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	17.5A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	28~14AWG	1.5mm ²
Wrth standing voltage	AC 2000V/1 Min	

Mechanical

Torque	0.5Nm(4.5Lb.in)
Temp.Range	-40°C~+105°C
Steip Length	7-8mm

Dimensions

Pitch	5.08mm
Poles	2-24p

Material

Housing	PA66, UL94V-0
Screws	M3.0 Steel Zn plated
C lamp	Phosphor bronze,Ni plated
Wire guard	Brass, Ni plated

linear dimension(Tolerances Standard GB/T 14486-2008)

≡ — □ // ⊥

variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4



CIXI WANJIE ELECTRONIC CO., LTD

THIRD ANGLE PROJECTION



TITLE WJ2EDGKM-5.08-XXP-1YY-00A