
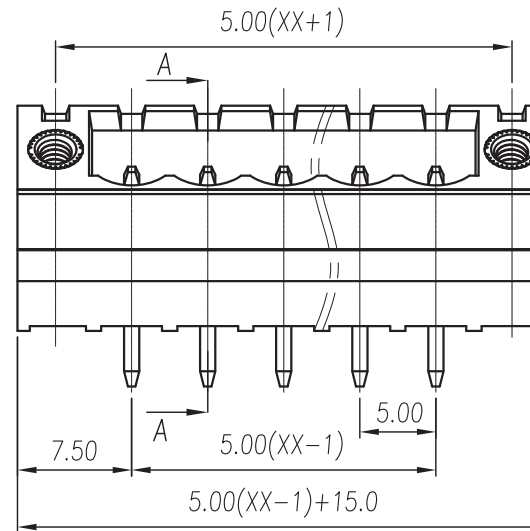
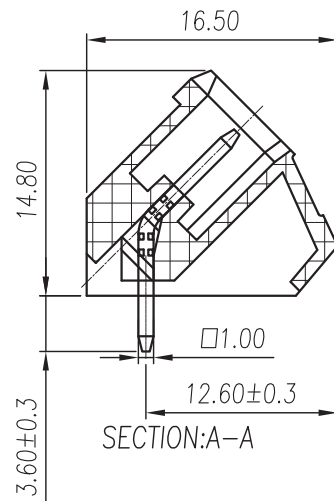
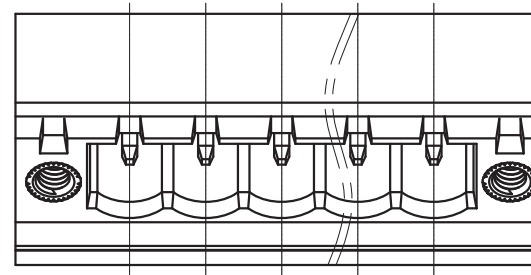


CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
------	-------------	---------	----------	------

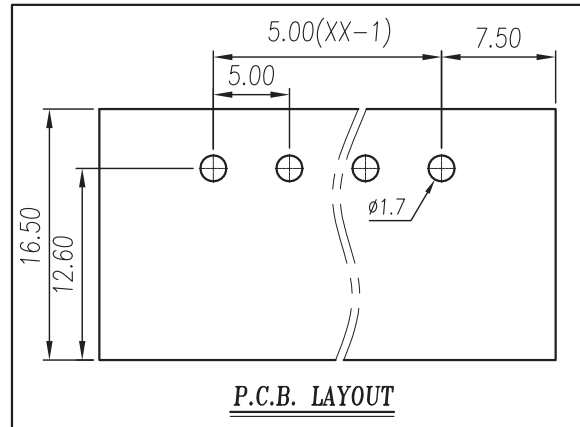

UL/CUL Technical Data				
Use Group		B	C	D
Rated Voltage	[V]	300	—	300
Rated Current	[A]	15	—	10
Wire Range		—		
Solid/Stranded	[AWG]			
Withstanding Voltage		1600V/1Min		
IEC Technical Data		IEC 61984		
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage	[V]	250	320	400
Rated Current	[A]	12	12	12
Impulse withstand voltagea	[KV]	4	4	4
Conductor cross section		—		
Solid/ flexible	[mm²]			
Material				
Insulation Material		PA66		
Imflammability		UL94V-0		
Conductor Material		Copper alloy		
Plating of conductor surface		Sn Plated		
Other Data				
Pitch/ Poles	[mm]/[P]	5.0/2-24		
Stripping Length	[mm]	-		
Screw/ Torque(Max)	[N.m]	-		
Operating temperatur	[°C]	-40~105		
Soldering temperatur	[°C]	250°C/5S		
Pin dimensions	[mm]	1.0*1.0		
PCB Hole Diameter	[mm]	Ø1.7		

linear dimension(Tolerances Standard GB/T 14486-2008)										—	□	⊥
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to	over 10 to 100	over 100 to		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

UNITS	mm	SIZE	A4	SCALE	2:1	THIRD ANGLE PROJECTION		REV	V0
 CIXI WANJIE ELECTRONIC CO., LTD									
						TITLE	WJ2EDGLM-5.0-XXP-1YY-00A		