




CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

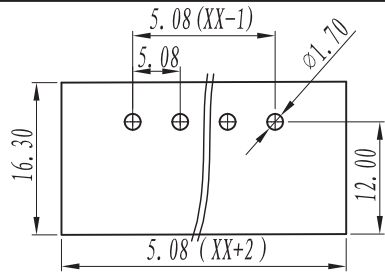

P.C.B. LAYOUT
S=1:2

Electrical

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wrth standing voltage	AC 2000V/1 Min	

Mechanical




Temp.Range	-40°C~+105°C
Temp.Range	+250°C 5秒

Dimensions

Pitch	5.08mm
Poles	2-24p

Material

Housing	PA66, UL94V-0
Pin header	Brass ,Tin plated
Nut	M2.5, Brass

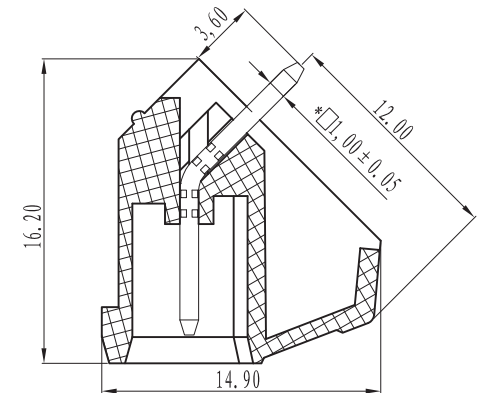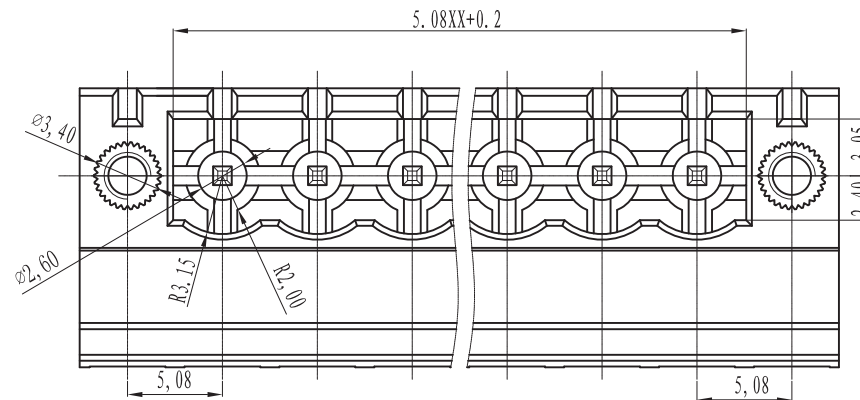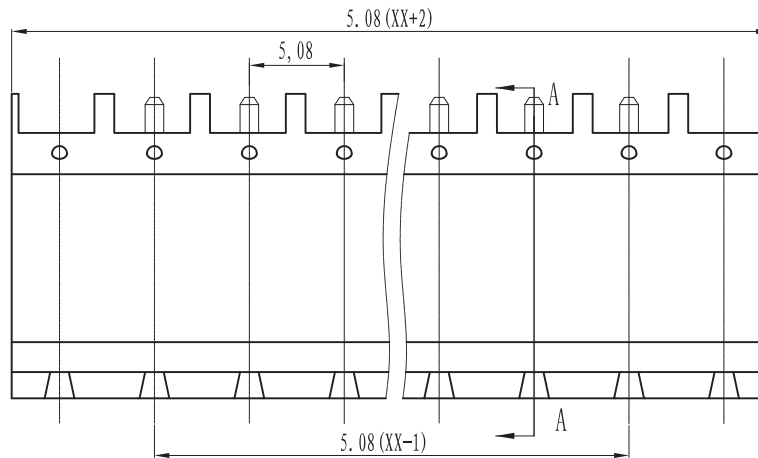


linear dimension(Tolerances Standard GB/T 14486-2008)

		over 6	over 10	over 18	over 30	over 50	over 80	over 120	over 160	over 200	over 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to
variable range	to 6	to 10	to 18	to 30	to 50	to 80	to 120	to 160	to 200	to 250	to		to 5	to 30	to 120	to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	2.5:1
					CIXI WANJIE ELECTRONIC CO., LTD

THIRD ANGLE PROJECTION



TITLE WJ2EDGLM-5.08-XXP-1YY-00A