


CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET



Electrical

Standard UL IEC
Rated voltage 300V 450V
Rated current 15A 17.5A

Contact resistance $20\text{m}\Omega$

Insulation resistance 500M Ω /DC500V Wrth standing voltage AC 1250V/1 Min

Mechanical

Temp.Range -40°C~+105°C

MAX Soidering +250°C for 5 Sec


Dimensions


Pitch 5mm 2*2-2*24p

Material

Housing PA66, UL94V-0

Pin header Brass, Tin plated

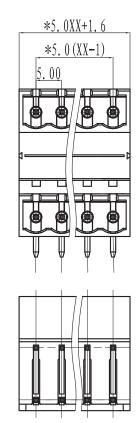



	linear dimension(Tolerances Standard GB/T 14486—2008)								=	_		//	Τ			
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	2.1		THIRD ANGLE PROJECTION
UNITS		SIZL	/ \¬	SUALE	2.1		
	_						9 5
SHULYOMPU	®	CIXI WANJIE E	LECTF	RONIC CO., LTD	TITLE	WJ2EDGRH-5.0-2*XXP-1YY-00A	