







CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

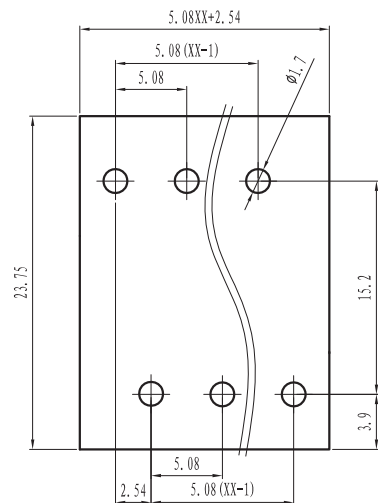

P.C.B. LAYOUT

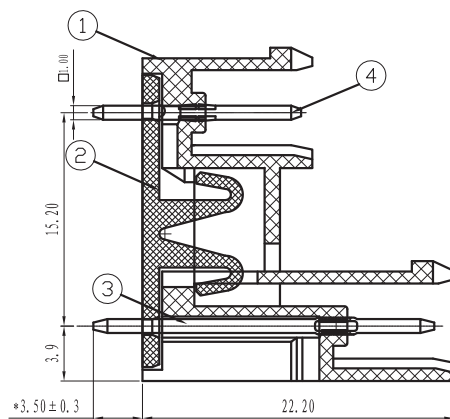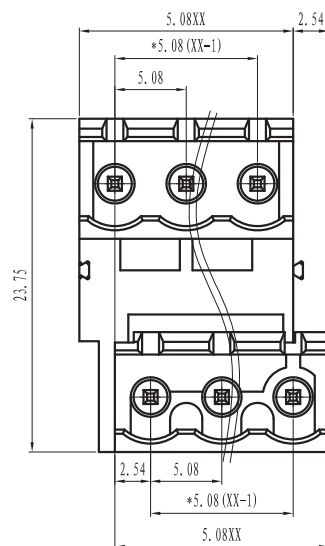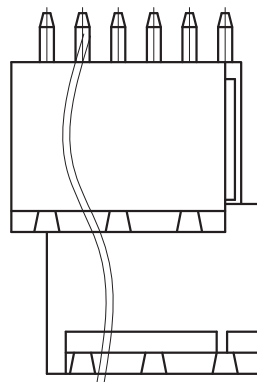

Electrical

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	17.5A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wrth standing voltage	AC 2000V/1 Min	

Mechanical

Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5 Sec

Dimensions

Pitch	5.08mm
Poles	2*2-2*24p

Material

Housing	PA66, UL94V-0
Pin header	Brass, Tin plated


linear dimension(Tolerances Standard GB/T 14486-2008)

variable	to	over	over	over	over	over	over	over	over	over			over	over	over
range	6	6	10	18	30	50	80	120	160	200	all	to	5	30	120
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	0.5	0.025	0.06	0.12	0.4



CIXI WANJIE ELECTRONIC CO., LTD

THIRD ANGLE PROJECTION



TITLE

WJ2EDGVT-5.08-2*XXP-1YY-00A